



SPECIFICATIONS	
Contact Form and Rating	up to 3C/O Contacts 30 Amps 250V AC/24V DC (Resistive)
Contact Resistance	< 50m Ohms at 1A 30V DC
Contact Material	AgCdO
Ambient Temperature	-40°C to +70°C
Dielectric Strength (Initial)	2500V AC (1 minute) between coil & contacts or coil to ground
Insulation Resistance	1000 Meg-Ohms at 500V DC
Operate Time	20 ms at nominal Voltage
Release Time	10 ms at nominal Voltage
Life Expectancy	10 ⁵ at nominal rated load
Coil Consumption	2.5W DC, 4.5V A
Weight	125 grams approx. (Max.)

COIL-DATA (All values at 27°C + 20 ambient)			
Nominal Voltage	Resistance in Ohms + 10%		Must operate Voltage @ 25° C
	DC Relays	AC Relays	
12	74	6.5	10
18	150	-	15
24	300	25	20
110	5500	-	90
115	-	570	95
220	21500	-	175
240	-	4700	190

ORDERING CODE

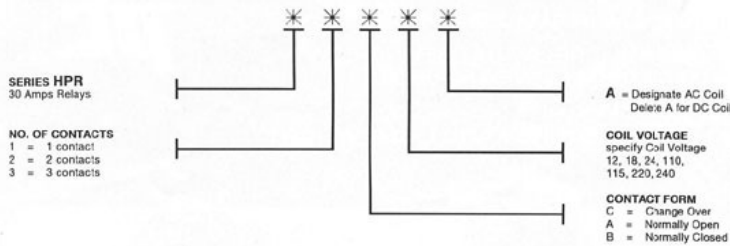

DIMENSIONS (in mm)

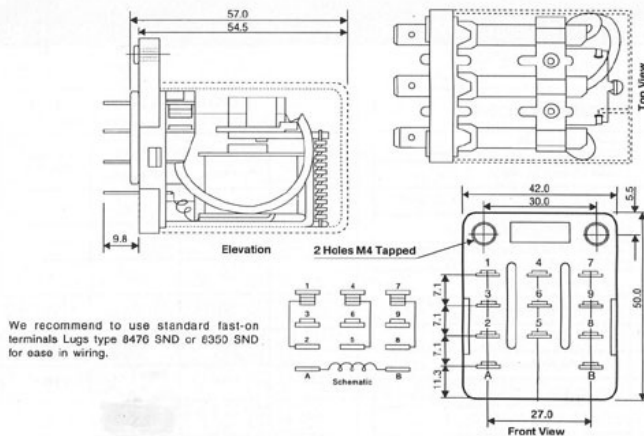

APPLICATIONS

- VOLTAGE STABILIZER
- FURNACE CONTROLS
- U.P.S.
- PROCESS CONTROL SYSTEM
- PHOTOCOPIING MACHINES
- INVERTOR
- AUTOMATION EQUIPMENT
- MOTOR STARTER
- VENDING MACHINES

MADHU SUBTRONIC COMPONENTS PVT.LTD

Off : 1 st Floor, Krishna Bldg, Shamrao Vithal Lane,
Off. Lamington Rd, Mumbai – 400 007
Tel : - 91 2380 0783 / 2386 4484 / 2387 6707, Fax : - 91 22 2387 6729
email : - mscpl@vsnl.com Website : - www.mscpl.com

